


LMR®-1200 Flexible Low Loss Communications Coax

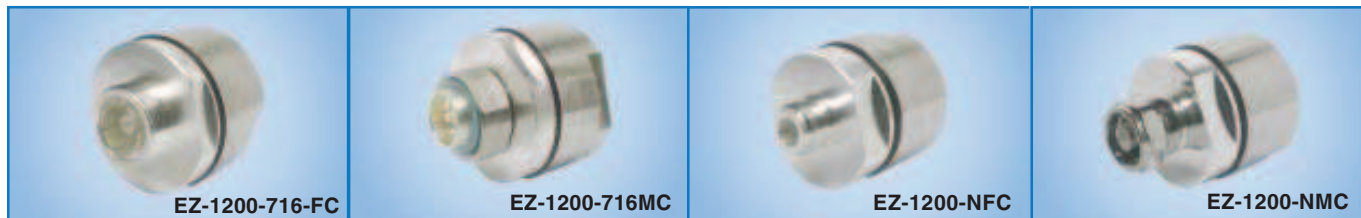

Connectors

Interface	Description	Part Number	Stock Code	VSWR** Freq. (GHz)	Coupling Nut	Inner Contact Attach	Outer Contact Attach	Finish* Body /Pin	Length in (mm)	Width in (mm)	Weight lb (g)
7-16 DIN Female	Straight Jack	EZ-1200-716FC	3190-338	<1.25:1 (2.5)	NA	Press Fit	Clamp	S/S	2.0 (51)	1.65 (41.9)	0.586 (265.8)
7-16 DIN Male	Straight Plug	EZ-1200-716MC	3190-337	<1.25:1 (2.5)	Hex	Press Fit	Clamp	S/S	2.0 (51)	1.65 (41.9)	0.648 (293.9)
7/8 EIA	Straight Plug	EZ-1200-78EIA	3190-1458	<1.25:1 (2.5)	NA	Press Fit	Clamp	S/S	3.2 (80)	2.25 (57.2)	1.208 (547.0)
N Female	Straight Jack	EZ-1200-NFC	3190-336	<1.25:1 (2.5)	NA	Press Fit	Clamp	S/S	2.0 (51)	1.65 (41.9)	0.650 (294.8)
N Male	Straight Plug	EZ-1200-NMC	3190-335	<1.25:1 (2.5)	Hex	Press Fit	Clamp	S/S	2.0 (51)	1.65 (41.9)	0.659 (298.9)

* Finishes: N=Nickel, S=Silver, G=Gold, SS=Stainless Steel, A=Alb alloy **VSWR spec based on 3 foot cable with a connector pair



Install Tools

Type	Part Number	Stock Code	Description
Strip Tool	ST-900/1200C	3190-311	For LMR 900 & 1200 Clamp Style Connectors
Strip Tool	ST-1200C	3190-1311	For LMR 1200 Clamp Style Connectors
Midspan Strip Tool	GST-1200A	3190-436	For Ground Strap Attachment
Wrench	WR-1200A	3190-512	1-9/16" Box Wrench (1 required)
Wrench	WR-1200B	3190-511	1-7/16" Box Wrench Pair (1 required)
Cutting Tool	CCT-01	3190-1544	Cable end flush cut tool
Replacement Blade	RB-01	3190-1609	Replacement blade for cutting tool