



This .125" x .125" grid Edgecard connector features early make/late make and shorting contact options. It also has a mylar strip on the contact tails for improved tip alignment to the printed circuit board.


OUTLINE

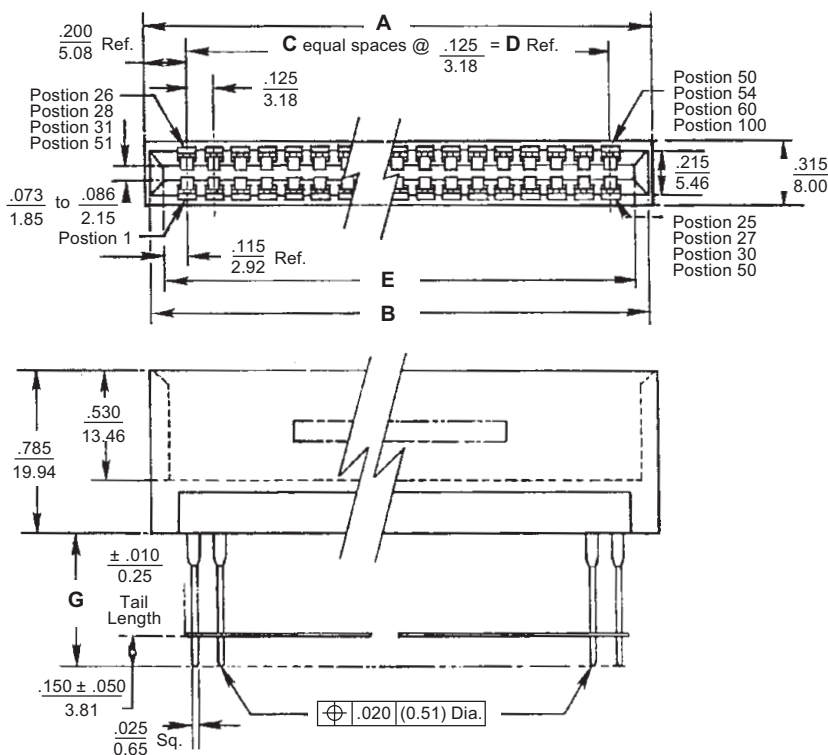

Early Make




Shorting

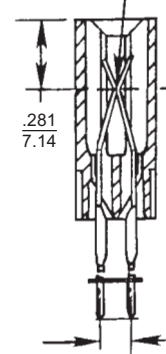

Contacts must be touching each other

Early/Late Make Contacts

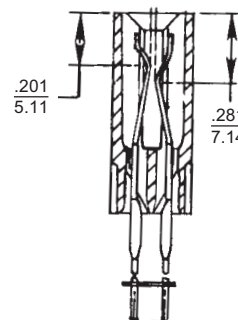

DIMENSIONS


Catalog Number	A	B	C	D	E $\pm .007$ (.178)	Shorting Contact Position	Contact QTY.	Early Make Contact Position	Contact QTY.	Late Make Contact Position	Contact QTY.	G Tail Length
276-25-30	3.400	3.360	24	3.000	3.230	None	—	1 thru 50	50	None	—	.634 (16.10)
276-25-46	(86.36)	(85.34)		(76.20)	(82.04)	None	—	1 thru 50	50	None	—	.425 (10.80)
276-27-06			26			None	—	1 thru 27	27	28 thru 54	27	.634 (16.10)
276-27-07	3.650	3.610		3.250	3.480	18, 22, 45, 49	4	1 thru 17 19 thru 21 23 thru 27	25	28 thru 44 46 thru 48 50 thru 54	25	.634 (16.10)
276-27-19	(92.71)	(91.69)		(82.55)	(88.39)	None	—	1 thru 54	54	None	—	.230 (5.84)
276-27-20						None	—	1 thru 27	27	28 thru 54	27	.425 (10.80)
276-50-05			49			None	—	1 thru 100	100	None	—	.230 (5.84)
276-50-31	6.525	6.485		6.125	6.355	None	—	1 thru 100	100	None	—	.634 (16.10)
276-50-47	(165.74)	(164.72)		(155.58)	(161.42)	None	—	1 thru 100	100	None	—	.425 (10.80)

BACKPANEL REQUIREMENTS

Hole Size & Plating —

Standard C-Press®: illustration on page CP/4.

Hole Pattern

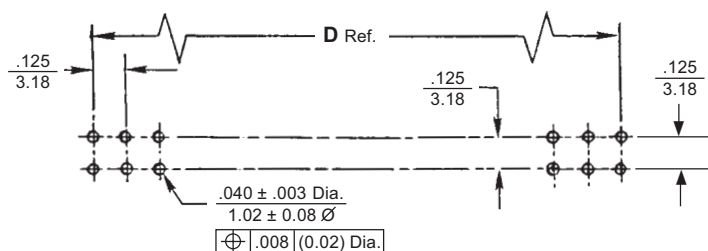

ORDERING INFORMATION

