



USB Connector A Type Upright Thru-hole (USB 2.0 Version)

SPECIFICATIONS

Materials

Insulator: thermoplastic, glass filled, UL 94V-0

Contacts: Phosphor bronze

Plated: 30µ" gold plated

SMD Plated: 120µ" tin plated

Plastic: PBT

Shell: Copper alloy, tin plated

Electrical

Insulation Resistance: 1000 MΩ minimum

Contact Resistance: 30 mΩ Max. initial


Dielectric Withstanding Voltage: 750V AC for one minute

Current: 1.5 Ampere max. per contact at 30°C T-rise

Voltage: 30V AC (rms)

Temperature: -55°C ~85°C

Directive 2002/95/EC
"RoHS"
Compliant

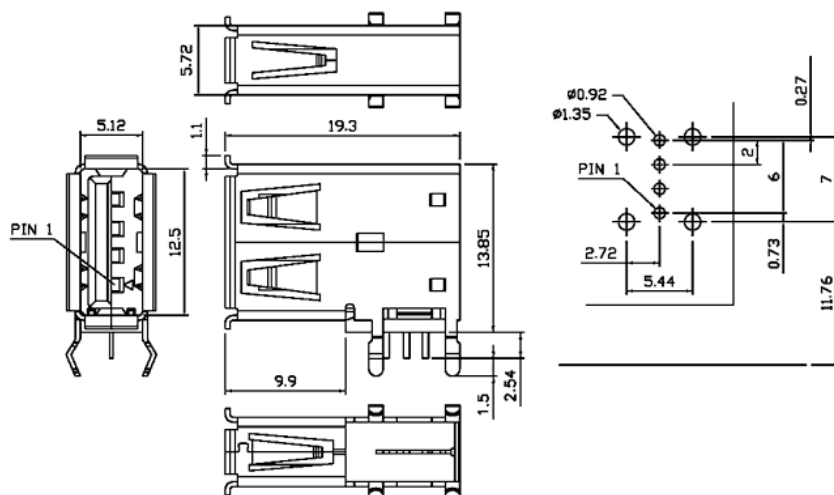

Order Information

33UBA U - 04 S W 1 1
1 2 3 4 5 6 7

1. Series No.

33UBA

3. No. Of Contacts

04: 4 pin

5. Insulator Color

W: White

7. Packaging

1: Packed in tray

2. Terminal Version

U: Upright

4. Connector Type

S: Female

6. Shield

1: Shielded



File #: 127344



File #: LR97981