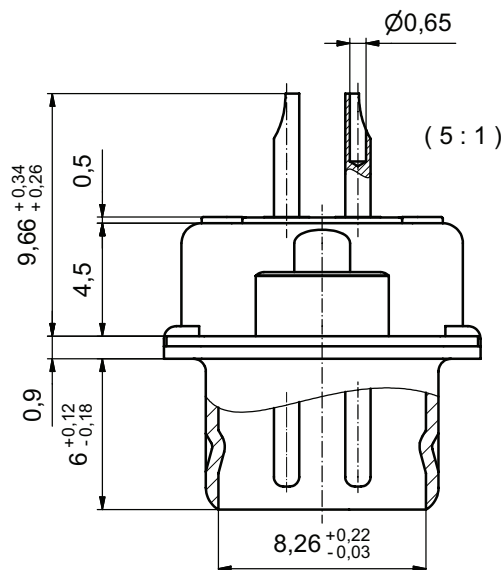
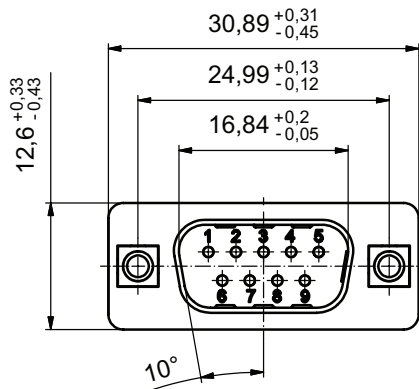


Directive 2002/95/EC
„RoHS“
Compliant

NOTES:

1. RoHS COMPLIANT
2. METAL SHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
3. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
4. CONTACTS: COPPER ALLOY
PLATING: 8µm HARD GOLD over min. 50µm NICKEL
SOLDER CUP ACCEPTS CABLE AWG 26
5. THREADED INSERT: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
6. COLLAR: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
7. CAPACITANCE: 1300pF ±20%
8. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
9. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
10. CONNECTOR IS PART MARKED: 241A11760X CONEC ABC

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	dim. in mm
date	name
drawn 05.03.09	Lehmenkühler
appd. 06.03.09	Fischer
norm	
d-old	

CONEC®

scale: 2:1 (5:1)	
material: SEE NOTES	
title: D-SUB FILTER MALE 9pos. SOLDER CUP	
dwg no:	Inventor 10
24K1A1154	
part no:	241A11760X
DIN-A3	sh: 1