
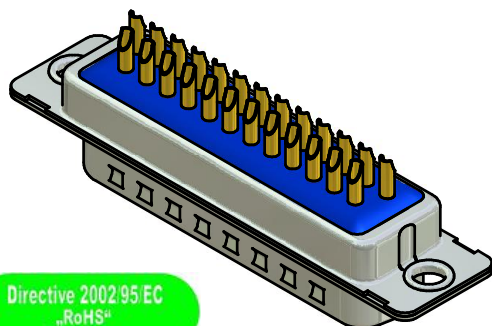

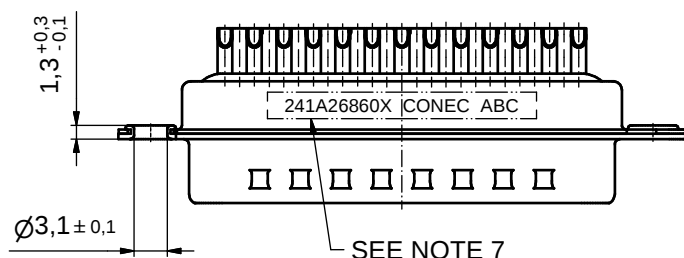
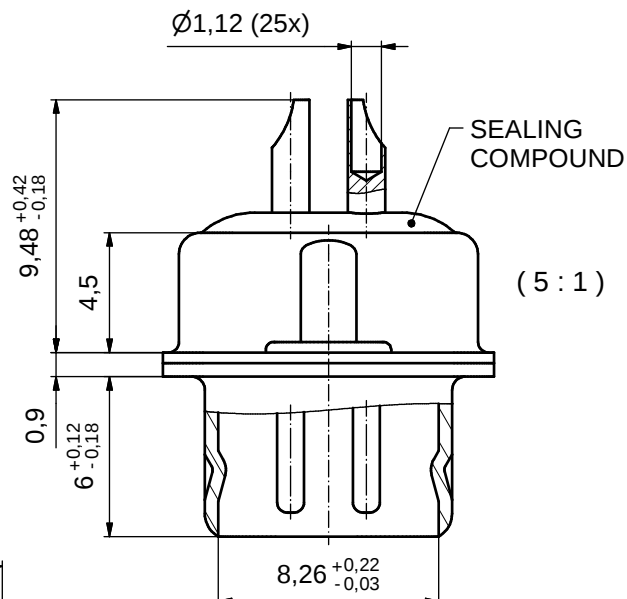


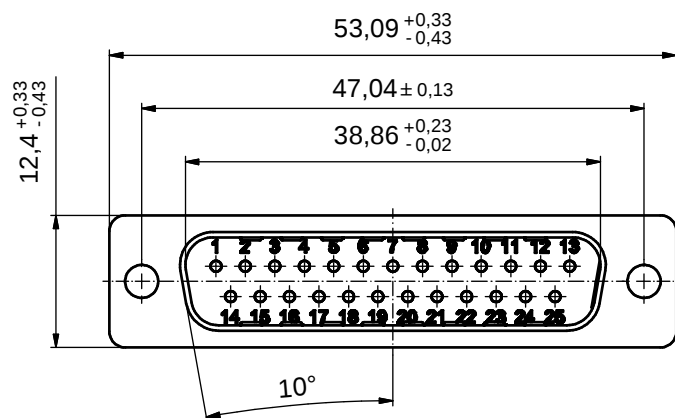

Directive 2002/95/EC
„RoHS“
Compliant

NOTES:

1. RoHS COMPLIANT
2. METAL SHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
3. INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
4. CONTACTS: COPPER ALLOY
PLATING: 8µm HARD GOLD over min. 50µm NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
5. CAPACITANCE: 180pF ± 20%
6. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
7. CONNECTOR IS PART MARKED: 241A26860X CONEC ABC

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

1 x b	A 3387	15.07.2009	Petker
a	Origin		
rev.	description	date	name

tolerance		 dim. in mm
	date	name
drawn	30.06.09	Petker
appd.	01.07.09	Fischer
norm		
d-old		



scale:	2:1 (5:1)		
material:	SEE NOTES		
title:	D-SUB FILTER MALE 25pos. SOLDER CUP		
dwg no:	Inventor 10	DIN-A3	
	24K1A1183		sh: 1
part no:	241A26860X		

CONEC