
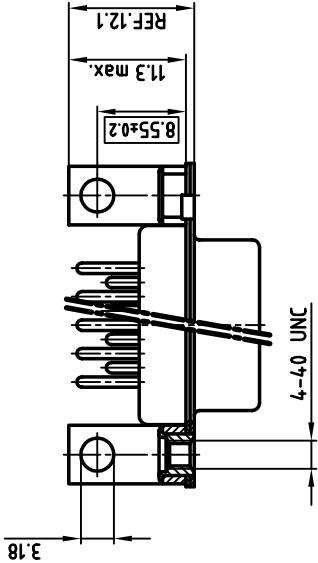
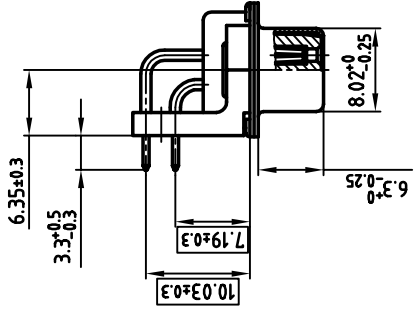


No. of pos.	A _{-0.76}	B _{-0.25}	C	Part NO.
9	31.19	16.46	25.00 _{-0.12} ^{-0.13}	242A12380X
15	39.52	24.79	33.30 _{-0.15} ^{-0.1}	242A12390X
25	53.42	38.50	47.04 _{-0.13} ^{-0.13}	242A12400X
37	69.70	54.96	63.50 _{-0.13} ^{-0.13}	242A12410X

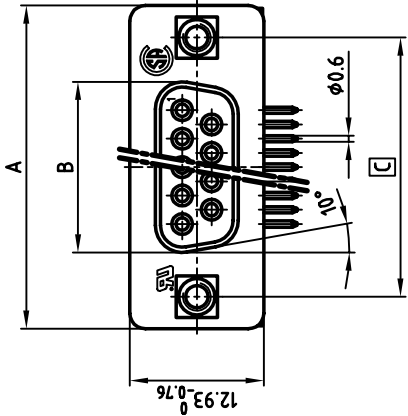

NOTES:

- METALSHELLS: STEEL; min. 320μ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
- PLATING: min. 8μ" HARD GOLD OVER min. 50μ" NICKEL
- METAL BRACKET: STEEL; min. 320μ" TIN over 80μ" NICKEL
- THREADED INSERT: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
- P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K111UA
- CAPACITANCE: 1300pF ±20%
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- ☐ = CRITICAL DIMENSION: SPC

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

tolerance		date		name	
		2001		Parei	
		drawn		E. Mickenbecker	
		appd.		DIN 41652	
		norm			
		e-old			
rev.	description	date	name		



scale:		title:	
2:1		D-SUB FILTER FEMALE 90°	
material:		0.318inch 9-37pos.	
		with threaded insert and metal bracket	
		dwg no: AutoCAD 2000	
		DIN-A	
		3	
		sh: 1/1	
		24K1A154A	
		part no: SEE TABLE	