
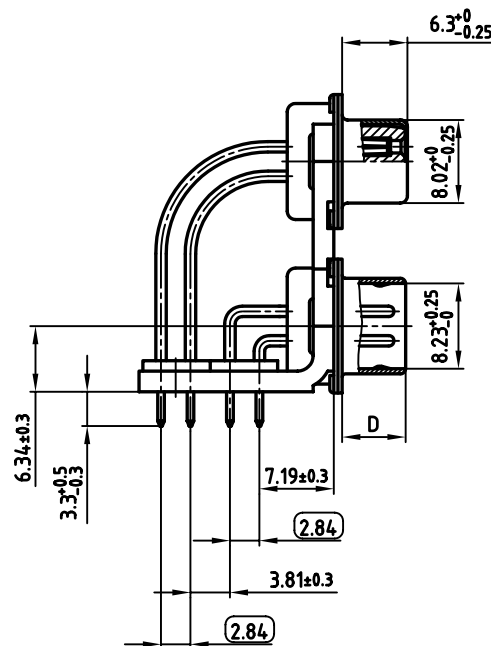
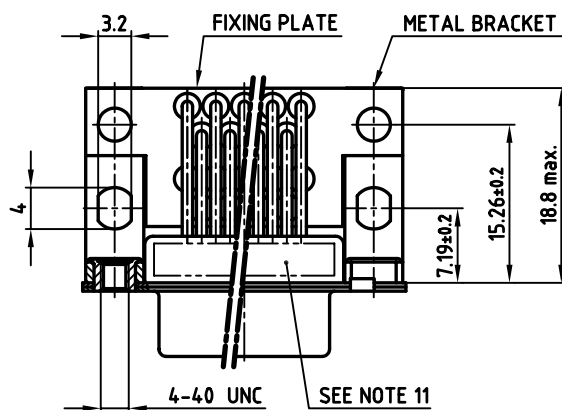


used for: D-SUB FILTER DUAL PORT

POS.	A _{-0.76}	B1 ^{+0.25}	B2 _{-0.25}	C	D _{-0.3}	PART-NO.
2x 9	31.19	16.79	16.46	25.00 ^{+0.12} _{-0.13}	6.12	242A14180X
2x15	39.52	25.12	24.79	33.30 ^{+0.15} _{-0.1}	6.12	242A14190X
2x25	53.42	38.84	38.50	47.04 ^{+0.13}	5.99	242A14200X
2x37	69.70	55.30	54.96	63.50 ^{+0.13}	5.99	242A14210X

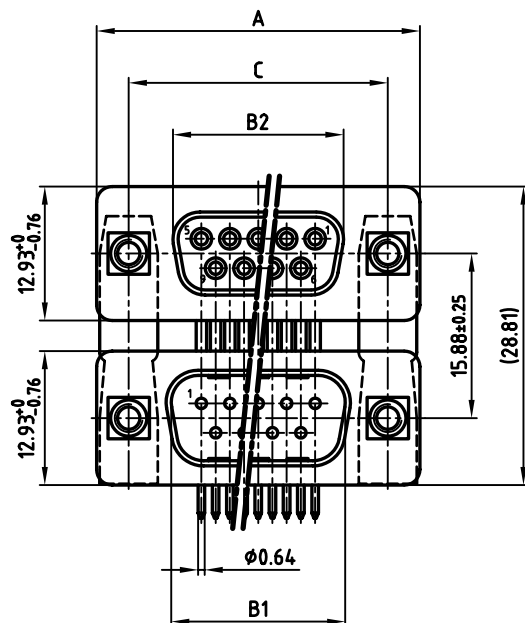

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
- METAL BRACKET: STEEL; min. 320µ" TIN over 80µ" NICKEL
- THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- FIXING-PLATE: PBT GF UL 94 V-0, BLACK
- P.C.B. HOLE DRILLINGS ON SHEET 2 + 3
- CAPACITANCE: 1300pF ±20%
- DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: **PART-NO. CONEC ABC**
- = CHECK DIMENSION



APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name


tolerance		dim. in mm
2005	date	name
drawn	27.05.	Lehmenkühler
appd.	27.05.	Kühle
norm	DIN 41652	
d-old		
CONEC		

scale:	2:1
material:	SEE NOTES
title:	D-SUB FILTER DUAL PORT 15.88mm FEMALE / MALE 2x9pos. - 2x37pos. with threaded insert
dwg no:	AutoCAD 2004 DIN-A
	3
	sh:1/3
part no:	SEE TABLE

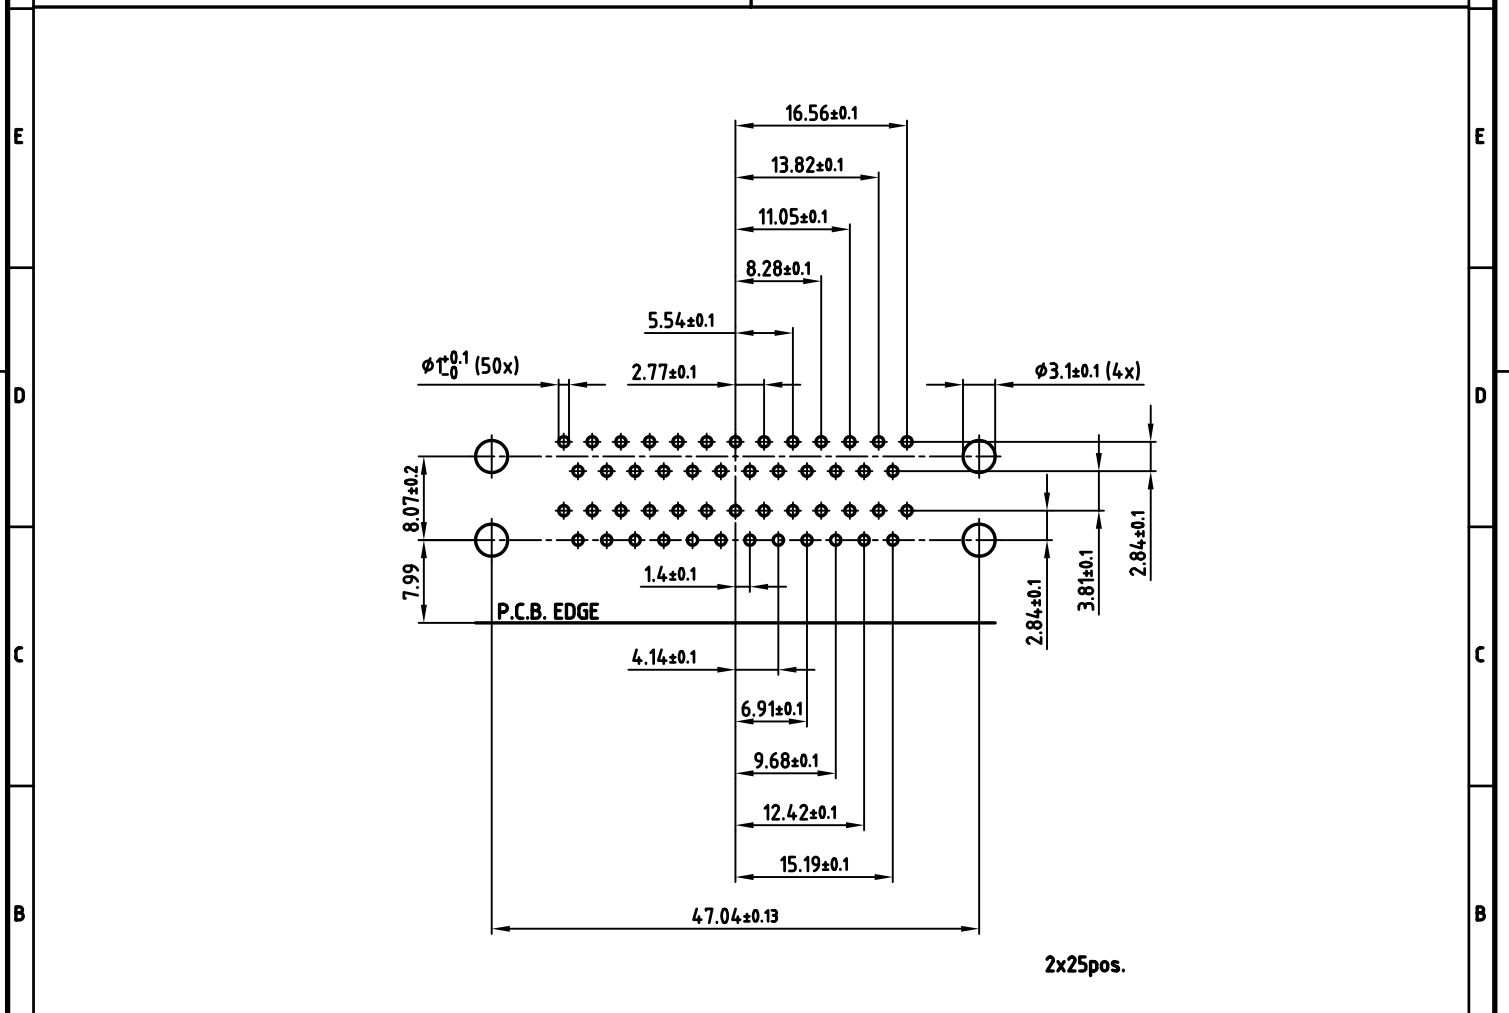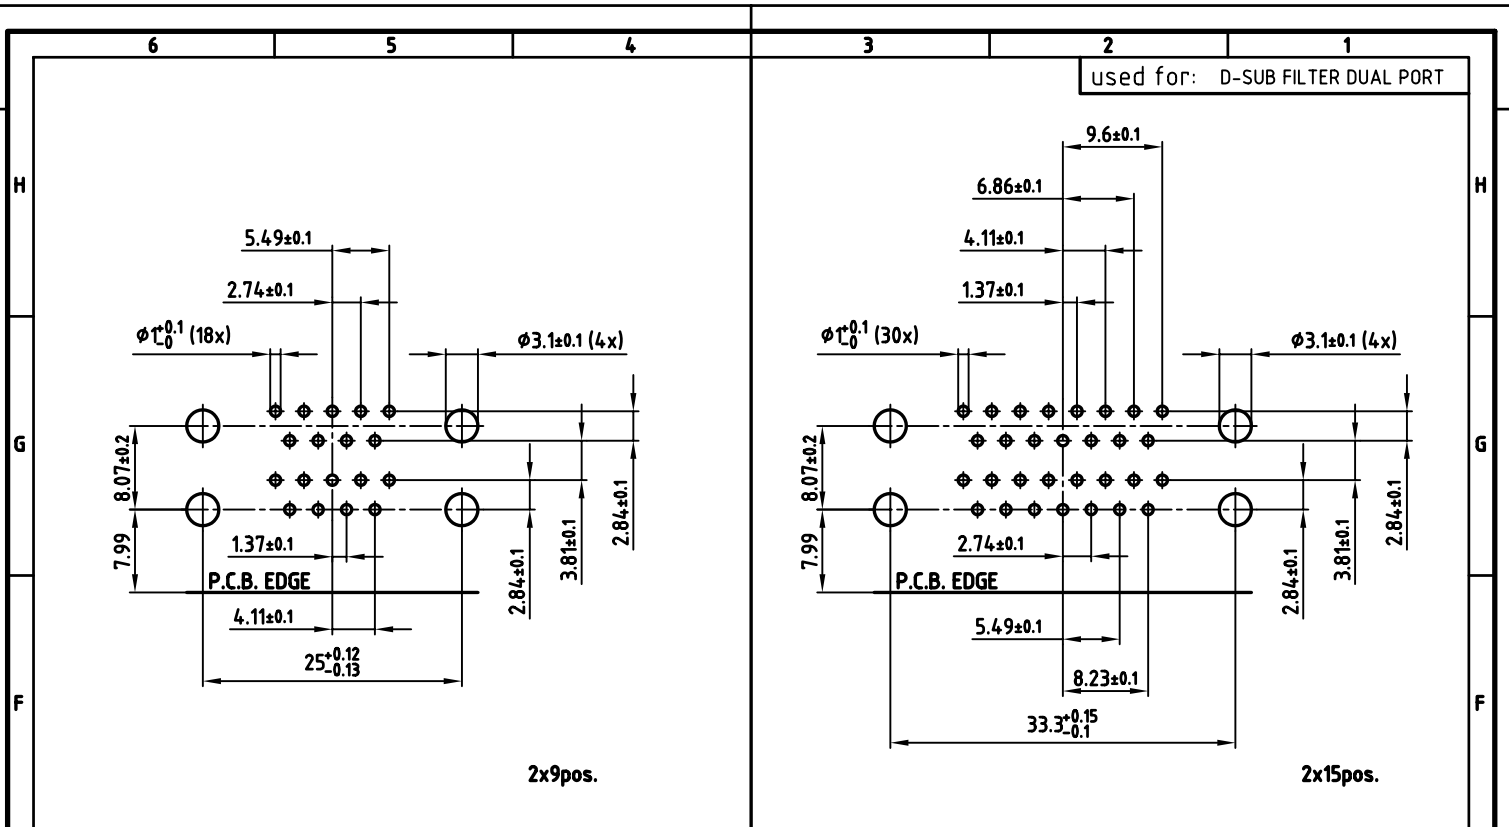

A	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL		CUSTOMER APPROVAL DATE:		APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON		THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.		DO NOT ALTER CAD DRAWING BY HAND				tolerance				scale: 2:1	
																	material: SEE SHEET 1	
	NAME:		TITLE:										2005 date name				title:	
													drawn 27.05. Lehmenkühler				P.C.B. HOLE DRILLINGS D-SUB FILTER DUAL PORT 15.88mm FEMALE / MALE 2x9pos. - 2x37pos.	
													appd. 27.05. Kühle					
	COMPANY NAME:												norm DIN 41652					
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL																dwg no: AutoCAD 2004 DIN-A 3 sh:2/3		
												rev. description date name				part no: SEE SHEET 1		
	6		5				4						2		1			

used for: D-SUB FILTER DUAL PORT

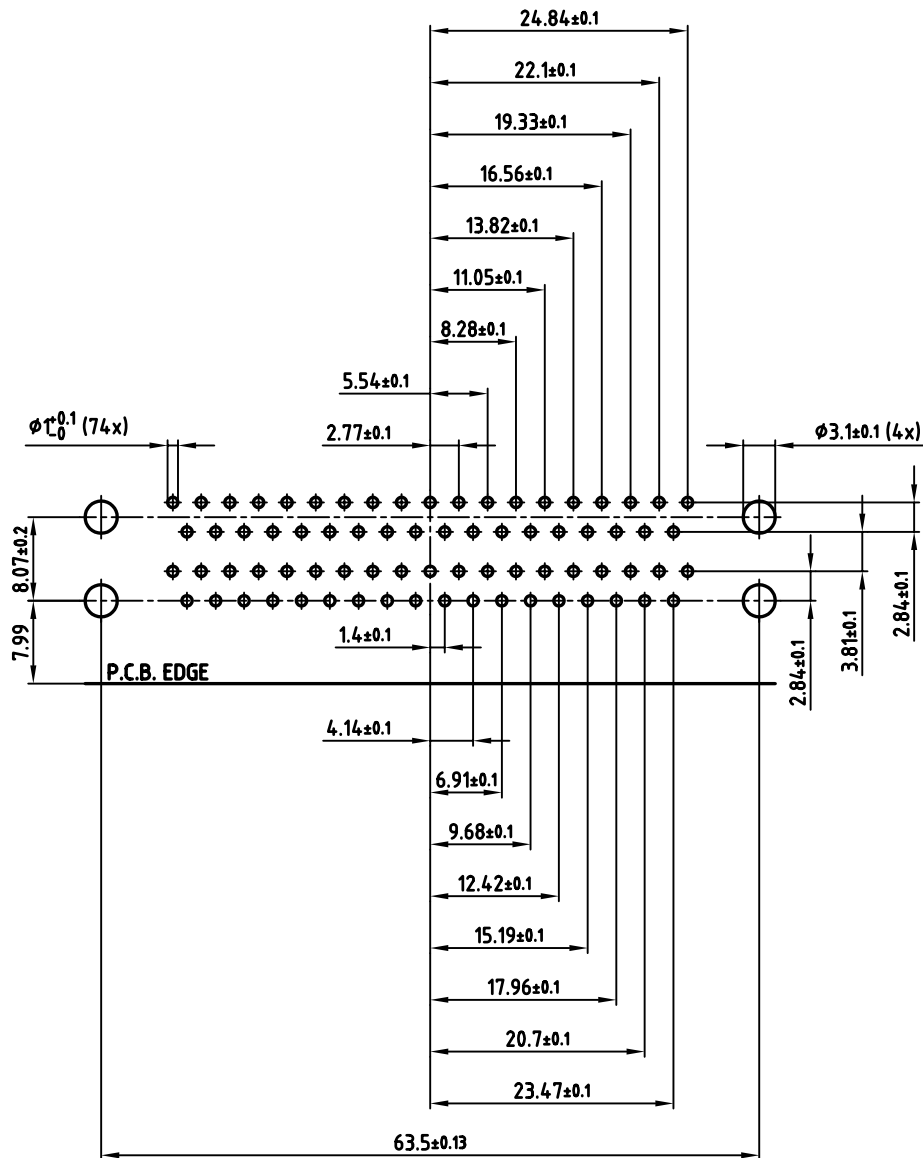

2x37pos.

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance			dim. in mm
2005	date		
drawn	27.05.	name	Lehmenkühler
appd.	27.05.	name	Kühle
norm	DIN 41652		
d-old			

scale:	2:1	
material:	SEE SHEET 1	
title:	P.C.B. HOLE DRILLINGS D-SUB FILTER DUAL PORT 15.88mm FEMALE / MALE 2x9pos. - 2x37pos.	
dwg no:	AutoCAD 2004	DIN-A
	24K1A648	3
part no:	SEE SHEET 1	
		sh:3/3