




2234-000-K331-6

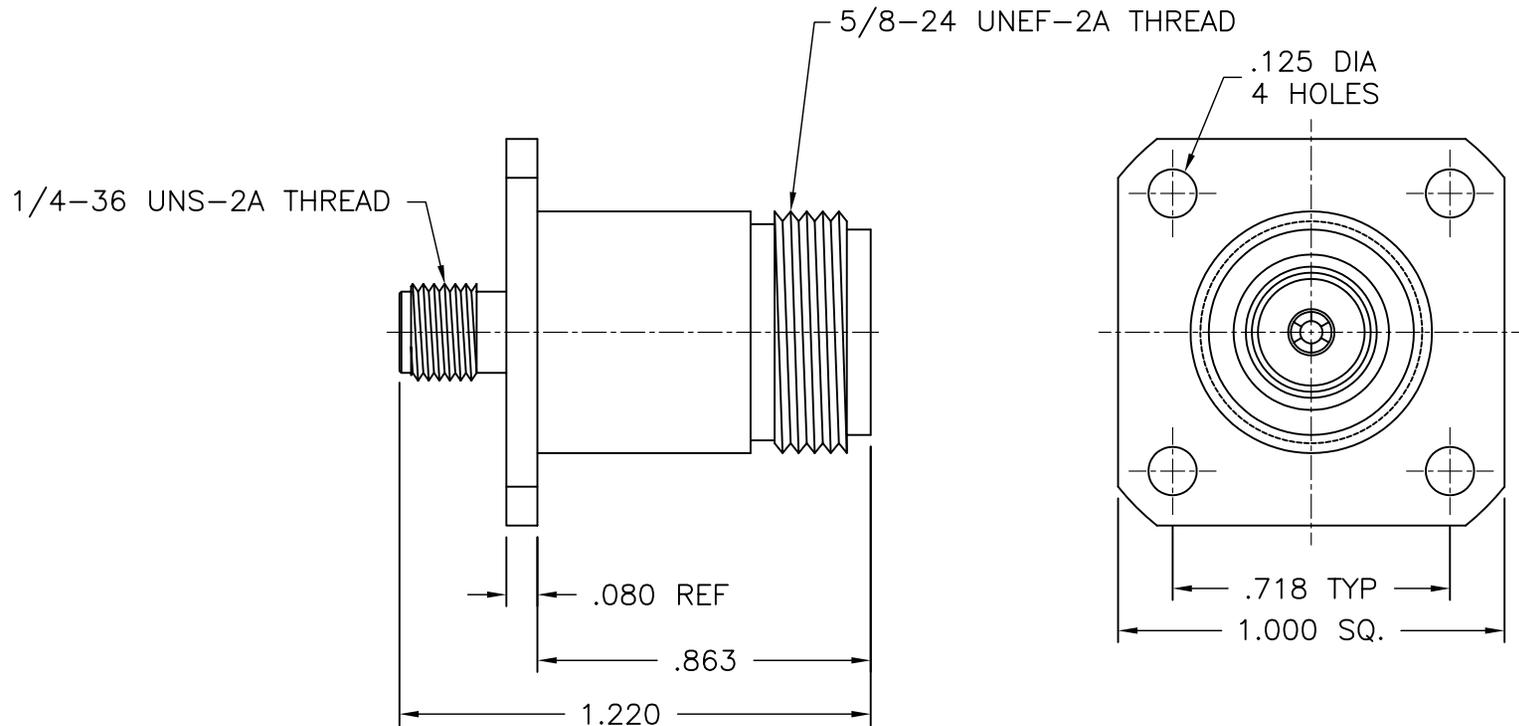

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY - CORROSION RESISTANT STEEL PER ASTM A582
CONTACT - BERYLLIUM COPPER PER ASTM B196.
INSULATOR - TEFLON PER ASTM D1710
3. FINISHES: BODY - PASSIVATE PER QQ-P-35
CONTACT - GOLD PLATE PER MIL-G-45204
4. VSWR: 1.06 + .005*F (Ghz) FROM DC TO 12.4 Ghz
.83 + .023*F (Ghz) FROM 12.4 Ghz TO 15 Ghz

DESC 8503812 FP-6

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE:
SMA JACK TO N JACK PANEL MOUNT ADAPTER

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ±.005, 2 PLACES = ±.02, ANGLES = ±1/2°, SURFACE FINISH = 63	ALT.	REVISIONS	DATE
	-	OUTLINE	11/2/05

Drawn by BJM	Scale 2/1	Ckd. by MR	Engr Appd MR	FILE NAME: 2234000K331-006T
11/2/05				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

CODE IDENT.-00795

2234-000-K331-6