



M5

The Connector Programme



www.binder-connector.de

SMALL BUT POWERFUL: THE M5 CONNECTOR

Small connector, big effect. The advantages of this series are obvious: the size, the weight and the price.

In addition to the overmoulded male cable connector and the overmoulded female cable connector, the family of M5 connectors also includes angled cable connectors, receptacles and male and female panel mount connectors, which are available with dip-solder contacts or single wires. Connecting cables that can be configured at the ends according to customer requirements, such as male to female, male angled to male angled and other possible combinations, are also very popular with customers. The pole patterns (3- and 4-pole) are compatible with each other in the M5, in contrast to the M8. For example, a 3-pole M5 male connector can be plugged to a 4-pole M5 female one.

MANUFACTURING

The production of M5 circular connectors, which began in 2002 in manual production, was converted to line production at the end of 2014 and takes place in plant 3 at binder in Neckarsulm. In addition to cost savings, the changeover means that it is now possible to react much more flexibly to customer requirements. At the same time, continuous attention is paid to "Made in Germany" quality.

MINIATURISATION

The trend towards miniaturisation also continues in sensor technology. Because installation space is precious and expensive, many customers are opting for ever smaller dimensions and connection options for their products. This is precisely where the M5 connector comes into play. With its 6.5 millimetre outer diameter and screw locking, it is very easy to handle.

In addition, it is waterproof with the tested IP67 protection class when mated and locked.

WEIGHT REDUCTION

Due to the ever-smaller connection options for data and signal transmission, it is advantageous for the service life of the connections if the hardware to be connected does not weigh so much, which is also a huge advantage of the M5 connectors. Due to the low material usage, a standard cable connector with two metres of cable, for example, only weighs around 30 grams in total. This material saving is also noticeable in the form of a more favourable price.

FURTHER DEVELOPMENT

For the M5 connector, a 360 degree shielding was recently successfully introduced to the market. This ensures undisturbed signal transmission, with which shielding attenuation values of 60 decibels in the range of one gigahertz can be achieved.

We are driving progress in the field of M5 with the constant further development of our products. This applies to both standard products and customised applications.

FEATURES

- Screw termination acc. to DIN EN 61076-2-105
- 3 and 4 contacts
- Degree of protection IP67
- Configurable to customer requirements
- Unshielded and shielded versions
- Overmoulded versions
- PUR cable





SECTORS AND FIELDS OF APPLICATION

The M5 connector is used for a wide range of applications. In addition to the classic areas of application in sensor technology, M5 connectors are also used in the field of cobot applications, which often offer little space or installation space for connections. Other areas of application include measuring devices, miniature valves, weather stations and drones.

- Cobot applications
- Drones
- Measuring devices
- Miniature valves
- Sensor and automation technology
- Weather stations

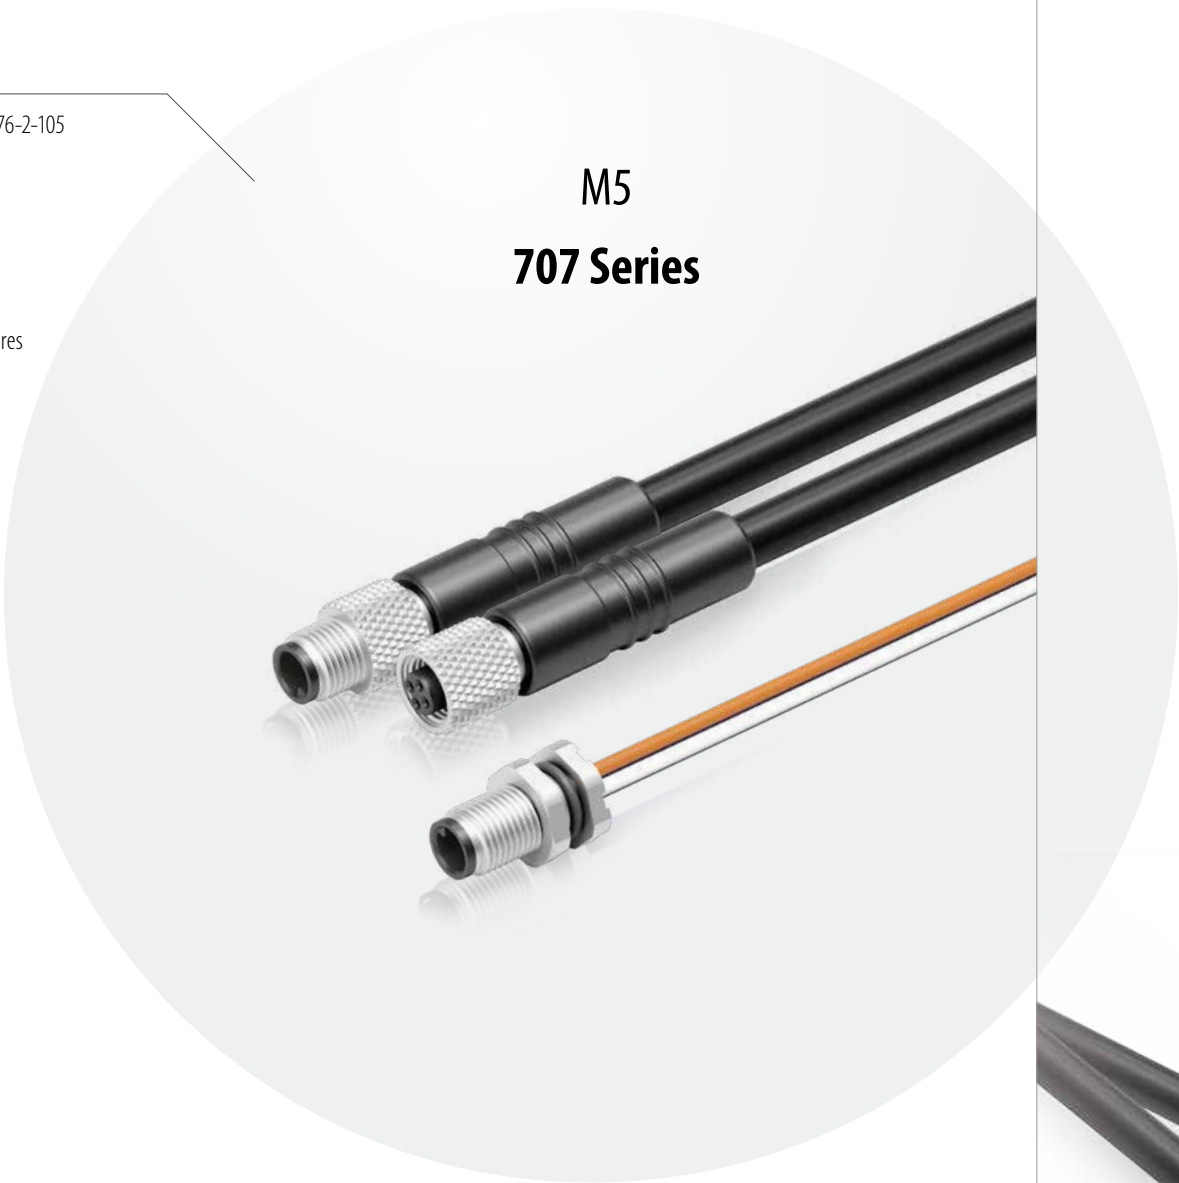
PRODUCT OVERVIEW



M5 Automation Technology
707 Series

- Screw locking according to DIN EN 61076-2-105
- 3 and 4 contacts
- Degree of protection IP67
- Moulded versions
- Thread nut with immunity to vibration
- Easy assembly
- Solder/dip solder termination/single wires
- Various variants

M5
707 Series



- Overmoulded versions with PUR cable in 2 and 5 m cable length
- Configurable according to customer requirements
- Unshielded and shielded versions
- UL approval

CONTENTS

	Range	Series	Contacts	Degree of protection
■ Connectors for sensors and actuators				
	M5	707	3, 4	IP67



Male receptacle for sensor tubes,
tube Ø 3,75–H7



Contacts	Wire gauge	Ordering-No.	Contacts	Wire gauge	Ordering-No.	Contacts	Ordering-No.	Contacts	Ordering-No.
3	3 x 0,14 mm²	09 3105 00 03	3	3 x 0,14 mm²	09 3105 86 03	3	09 3105 81 03	4	09 3111 71 04
	3 x 0,25 mm²	09 3105 01 03							
4	4 x 0,14 mm²	09 3111 00 04	4	4 x 0,14 mm²	09 3111 86 04	4	09 3111 81 04		
	4 x 0,25 mm²	09 3111 01 04							

Number of contacts	3	4
Connector locking system	screw	
Termination	single wires, dip solder, solder	
Wire gauge	0,14 mm ² (AWG 26), 0,25 mm ² (AWG 24)/ —	
Cable outlet	—	
Degree of protection	IP67	
Mechanical operation	> 100 mating cycles	
Upper temperature	+ 80 °C	
Lower temperature	– 25 °C	
Rated voltage	60 V	
Rated impulse voltage	800 V	
Pollution degree	3	
Overvoltage categorie	II	
Material group	I	
Rated current (40 °C)	1 A	
Material of contact	CuZn (brass)	
Contact plating	Au (gold)	
Material of contact body	PA	
Material of housing	CuZn (brass nickel plated)	
Material of locking	—	

Female panel mount connector, front fastened,
dip solder




Technical drawing of a shaft assembly. The drawing shows a shaft with a diameter of $\varnothing 9,5$ mm. A component with a bore of $M7 \times 0,75$ is mounted on the shaft. The distance from the end face to the center of the bore is 10 mm. The distance between the two mounting points is 2 mm. The distance from the second mounting point to the end face is 2,1 mm. The total length of the shaft is 0,5 mm. The drawing also indicates a SW 9mm wrench size.

Contacts	Wire gauge	Ordering-No.	Contacts	Wire gauge	Ordering-No.	Contacts	Ordering-No.
3	3 x 0,14 mm²	09 3106 00 03	3	3 x 0,14 mm²	09 3106 86 03	3	09 3106 81 03
	3 x 0,25 mm²	09 3106 01 03					
4	4 x 0,14 mm²	09 3112 00 04	4	4 x 0,14 mm²	09 3112 86 04	4	09 3112 81 04
	4 x 0,25 mm²	09 3112 01 04					


Number of contacts	3	4
Connector locking system	screw	
Termination	single wires, dip solder	
Wire gauge	0,14 mm ² (AWG 26), 0,25 mm ² (AWG 24)/ —	
Cable outlet	—	
Degree of protection	IP67	
Mechanical operation	> 100 mating cycles	
Upper temperature	+ 80 °C	
Lower temperature	– 25 °C	
Rated voltage	60 V	
Rated impulse voltage	800 V	
Pollution degree	3	
Overvoltage categorie	II	
Material group	I	
Rated current (40 °C)	1 A	
Material of contact	CuSn (bronze)	
Contact plating	Au (gold)	
Material of contact body	PA	
Material of housing	CuZn (brass nickel plated)	
Material of locking	—	

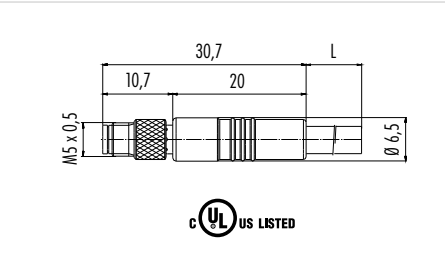Male cable connector, moulded, M5 x 0,5




Contacts	Cable length	Ordering-No. ²⁾
3	2 m	77 3459 0000 40003–0200
	5 m	77 3459 0000 40003–0500
	2 m	77 3459 0000 50003–0200
	5 m	77 3459 0000 50003–0500
4	2 m	77 3459 0000 40004–0200
	5 m	77 3459 0000 40004–0500
	2 m	77 3459 0000 50004–0200
	5 m	77 3459 0000 50004–0500

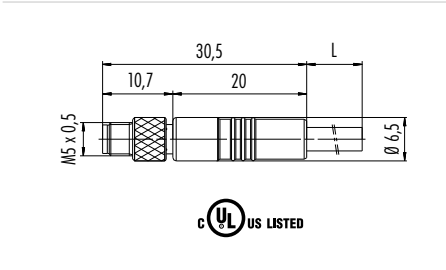Male cable connector, moulded, M5 x 0,5, shielded



Contacts	Cable length	Ordering-No. ²⁾
3	2 m	77 3559 0000 40003-0200
	5 m	77 3559 0000 40003-0500
4	2 m	77 3559 0000 40004-0200
	5 m	77 3559 0000 40004-0500

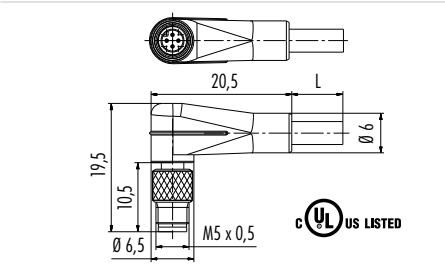Male angled connector, moulded, M5 x 0,5




Contacts	Cable length	Ordering-No. ²⁾
3	2 m	77 3457 0000 40003–0200
	5 m	77 3457 0000 40003–0500
	2 m	77 3457 0000 50003–0200
	5 m	77 3457 0000 50003–0500
4	2 m	77 3457 0000 40004–0200
	5 m	77 3457 0000 40004–0500
	2 m	77 3457 0000 50004–0200
	5 m	77 3457 0000 50004–0500

Specifications of cable	3		4	
Wire gauge mm² ¹⁾	3 x 0,14 mm² (AWG 26)	3 x 0,25 mm² (AWG 24)	4 x 0,14 mm² (AWG 26)	4 x 0,25 mm² (AWG 24)
Material jacket	PUR			
Insulation wire	PVC			
Design of wire (mm)	18 x 0,1	32 x 0,1	18 x 0,1	32 x 0,1
Cable jacket Ø (mm)	3,1	3,7	3,5	4
Resistance of wire	148 Ω/Km (20 °C)	79 Ω/Km (20 °C)	148 Ω/Km (20 °C)	79 Ω/Km (20 °C)
Temperature range (cable in move)	– 5 °C /+80 °C			
Temperature range (static cable)	– 25 °C /+ 80 °C			
Bending radius (cable in move)	10 x D			
Bending radius (static cable)	5 x D			
Approval	—			


Number of contacts	3	4
Connector locking system	screw	
Termination	crimp, moulded	
Wire gauge	0,14 mm² (AWG 26), 0,25 mm² (AWG 24)	
Cable outlet	—	
Degree of protection	IP67	
Mechanical operation	> 100 mating cycles	
Upper temperature	+ 80 °C	
Lower temperature	– 25 °C	
Rated voltage	60 V	
Rated impulse voltage	1500 V	
Pollution degree	3	
Overvoltage categorie	II	
Material group	I	
Rated current (40 °C)	1 A	
Material of contact	CuSn (bronze)	
Contact plating	Au (gold)	
Material of contact body	PUR	
Material of housing	PUR	
Material of locking	CuZn (brass nickel plated)	

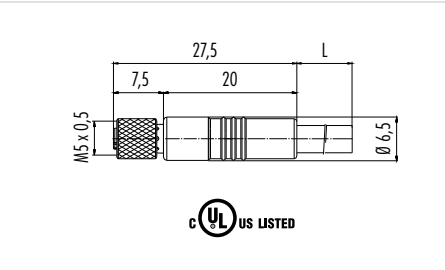Female cable connector, moulded, M5 x 0,5




Contacts	Cable length	Ordering-No. ²⁾
3	2 m	77 3450 0000 40003–0200
	5 m	77 3450 0000 40003–0500
	2 m	77 3450 0000 50003–0200
	5 m	77 3450 0000 50003–0500
4	2 m	77 3450 0000 40004–0200
	5 m	77 3450 0000 40004–0500
	2 m	77 3450 0000 50004–0200
	5 m	77 3450 0000 50004–0500

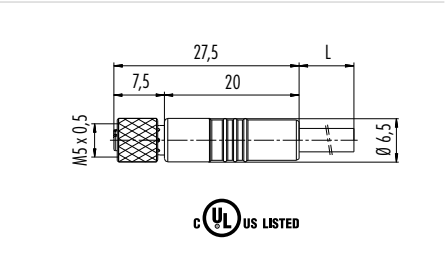Female cable connector, moulded, M5 x 0,5, shielded



Contacts	Cable length	Ordering-No. ²⁾
3	2 m	77 3550 0000 40003-0200
	5 m	77 3550 0000 40003-0500
4	2 m	77 3550 0000 40004-0200
	5 m	77 3550 0000 40004-0500










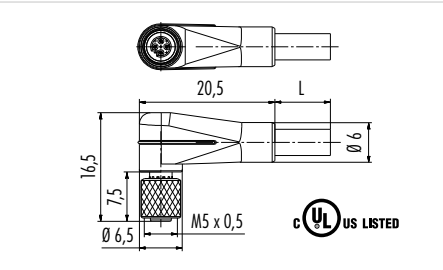
Female angled connector, moulded, M5 x 0,5





Contacts	Cable length	Ordering-No. ²⁾
3	2 m	77 3454 0000 40003–0200
	5 m	77 3454 0000 40003–0500
	2 m	77 3454 0000 50003–0200
	5 m	77 3454 0000 50003–0500
4	2 m	77 3454 0000 40004–0200
	5 m	77 3454 0000 40004–0500
	2 m	77 3454 0000 50004–0200
	5 m	77 3454 0000 50004–0500

Specifications of cable	3		4	
Wire gauge mm² ¹⁾	3 x 0,14 mm² (AWG 26)	3 x 0,25 mm² (AWG 24)	4 x 0,14 mm² (AWG 26)	4 x 0,25 mm² (AWG 24)
Material jacket	PUR			
Insulation wire	PVC			
Design of wire (mm)	18 x 0,1	32 x 0,1	18 x 0,1	32 x 0,1
Cable jacket Ø (mm)	3,1	3,7	3,5	4
Resistance of wire	148 Ω/Km (20 °C)	79 Ω/Km (20 °C)	148 Ω/Km (20 °C)	79 Ω/Km (20 °C)
Temperature range (cable in move)	– 5 °C /+80 °C			
Temperature range (static cable)	– 25 °C /+ 80 °C			
Bending radius (cable in move)	10 x D			
Bending radius (static cable)	5 x D			
Approval	—			

Number of contacts	3	4
Connector locking system	screw	
Termination	crimp, moulded	
Wire gauge	0,14 mm² (AWG 26), 0,25 mm² (AWG 24)	
Cable outlet	—	
Degree of protection	IP67	
Mechanical operation	> 100 mating cycles	
Upper temperature	+ 80 °C	
Lower temperature	– 25 °C	
Rated voltage	60 V	
Rated impulse voltage	1500 V	
Pollution degree	3	
Overvoltage categorie	II	
Material group	I	
Rated current (40 °C)	1 A	
Material of contact	CuSn (bronze)	
Contact plating	Au (gold)	
Material of contact body	PUR	
Material of housing	PUR	
Material of locking	CuZn (brass nickel plated)	

Contact arrangements	Male insert (mating side)	Female insert (mating side)
3 contacts	 1 2 3 4 brown not assembled blue black	 1 2 3 4 brown not assembled blue black
4 contacts	 1 2 3 4 brown white blue black	 1 2 3 4 brown white blue black
	Drilling schemes male insert (PCB), shielding sheet	Drilling schemes female insert (PCB), shielding sheet
3 contacts		
4 contacts		
Panel cut outs		
Panel mount connectors	 	
Male panel mount connectors, front fastened	 	Female panel mount connectors, front fastened
	 	

Description	Drawing	Ordering-No.
Protection cap for female connectors	 	08 2610 000 000
Hexagonal nut M5 x 0,5	 	01 5118 001



M5

The Connector Programme





**Franz Binder GmbH & Co.
Elektrische Bauelemente KG**

Rötelsstraße 27
74172 Neckarsulm
Germany

Tel. +49 7132 325-0
Fax +49 7132 325-190

vk@binder-connector.de
www.binder-connector.de

11/2022

