

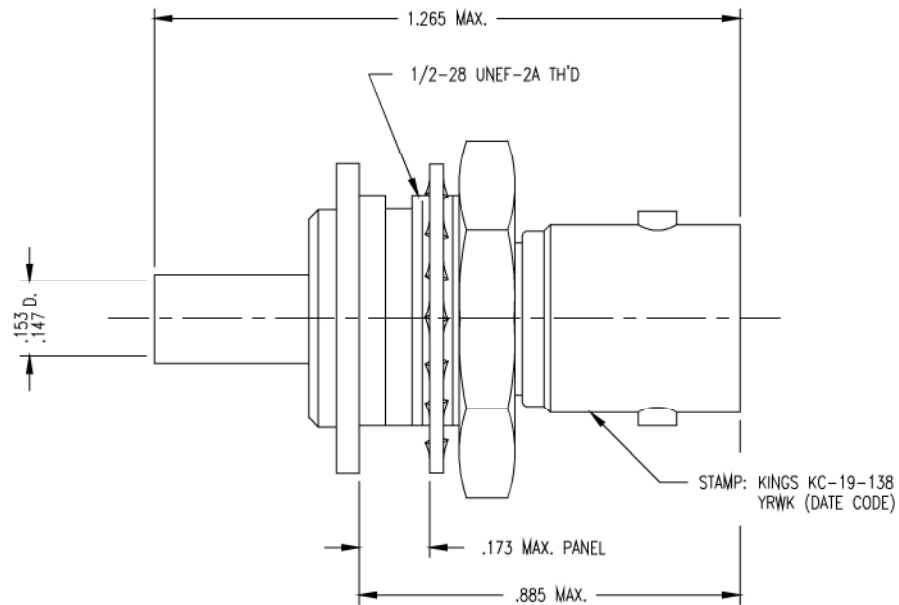


GSD



NOTES:

1. FOR USE WITH CABLES RG-174, 179A, 179B, 187, 187A, 188 & 188A/U.
2. FOR CABLING INSTRUCTIONS SEE CP-431.
3. FOR CABLE TRIMMING USE KTJ-59 & KTD-113.
4. FOR CRIMPING USE DIE KTH-2032.
5. MATERIALS:
INSULATORS-PTFE, ASTM-D-1457
K-GRIP SLEEVE-COM. BRONZE TUBE, ALLOY 220
CENTER CONTACT-BER. COP., ASTM-B-196
ALL OTHER METAL PARTS-BRASS, ASTM-B16
6. FINISHES:
CONTACTS-SILVER PLATE PER ASTM B700
ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
WORKING VOLTAGE-500 VRMS
FREQUENCY RANGE-DC TO 4 GHz

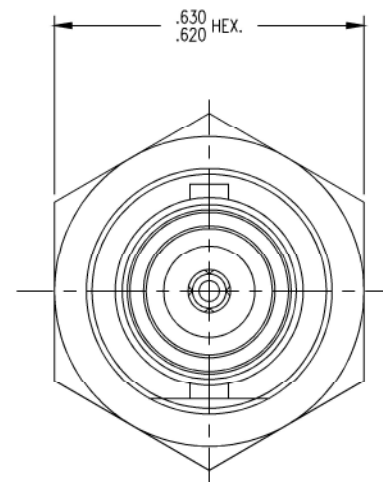

MOUNTING HOLE

GSD

KC-19-138

REVISIONS

ISSUE	CHANGES
7	CN 28714 D JCA 02 MAR 90
8	CN 38095 E TML 10/09/00
9	CN 38655 C BDH 11/15/02
L	ER070510 JI 11/07/17

WAS:
JCA0373

KC19138S

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

JACK, BULKHEAD, ISOLATED GROUND, BNC

DRAWN	JCA	DATE	03/01/90
DESIGN	MJR	DATE	03/19/90
APPR.		DATE	

KINGS

ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KC-19-138