


755-114-9

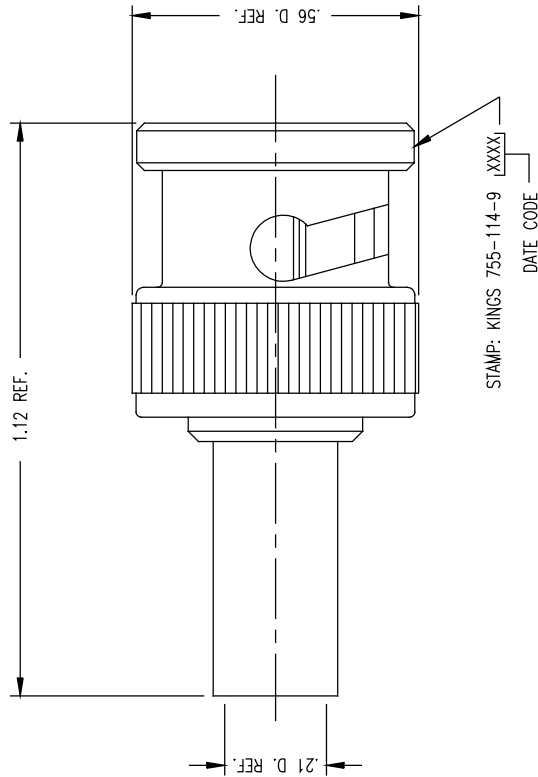

NOTES:

1. FOR USE WITH RG-58 AND 141/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE CP-465.
3. FOR CRIMPING USE DIE KTH-2001.
4. INTERFACE PER MIL-STD-348. FIG. 301-1.
5. CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
6. MATERIALS:
 - INSULATOR: PTFE, ASTM-D4894
 - GASKET: SILICONE RUBBER, A-A-59588
 - SPRING WASHER: BER. COP. ASTM-B-196
 - OUTER CONTACT: BER. COP. ASTM-B-196
 - CRIMP SLEEVE: COMM. BRONZE ASTM-B16, H02
 - ALL OTHER METAL PARTS: BRASS, ASTM-B36
7. FINISHES:
 - CENTER CONTACT: GOLD PLATE PER ASTM-B488
 - ALL OTHER METAL PARTS: NICKEL PLATE PER SAE-AWS-QQ-N-290
8. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHM
 - FREQUENCY RANGE: DC TO 4 GHz
 - VOLTAGE RATING: 500 VOLTS RMS

DSG

[illegible]