


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

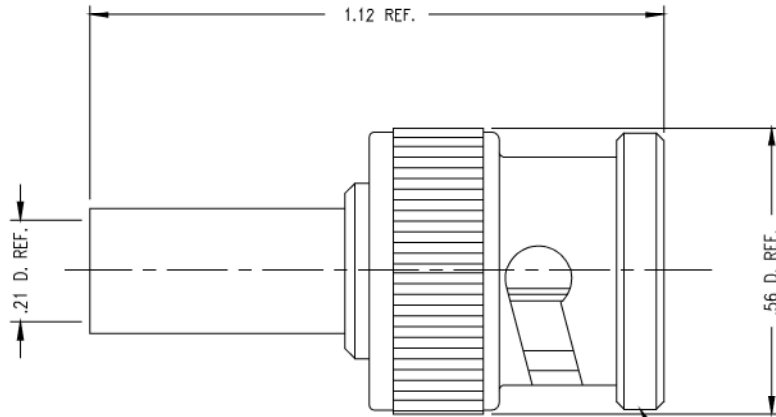

STAMP: 91836 M39012/16-0013
 755-114-5 ,XXXX,
 DATE CODE

NOTES:

- FOR USE WITH RG-58 AND 141/U CABLE GROUPS.
- FOR CABLING INSTRUCTIONS SEE CP-465.
- FOR CRIMPING USE DIE KTH-2001.
- INTERFACE PER MIL-STD-348, FIG. 301-1.
- CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
- MATERIALS:
 INSULATOR: PTFE, ASTM-D4894
 GASKET: SILICONE RUBBER, A-A-59588
 SPRING WASHER: BER. COP. ASTM-B-196
 OUTER CONTACT: BER. COP. ASTM-B-196
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:
 CENTER CONTACT: GOLD PLATE PER ASTM-B488
 ALL OTHER METAL PARTS: SILVER PLATE PER ASTM-B700
- ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHM
 FREQUENCY RANGE: DC TO 4 GHz
 VOLTAGE RATING: 500 VOLTS RMS

REVISIONS	
ISSUE	CHANGES
0	ER 38996 DCT 1/15/4
1	CN 39116 E DCT 7/12/4
C	ER064333 JI 11/02/16
D	ER068761 JI 06/19/17

M39012/16-0013

SCALE 4:1	
APPROX SURFACE AREA	
755-114-5	
USED ON	
REF:	
PLUG, BNC	
DRAWN DCT	DATE 1/8/4
DESIGN DCT	DATE 10/24/3
APPR.	DATE
 ROCK HILL, SOUTH CAROLINA 29730	

GSD

M39012/16-0013