


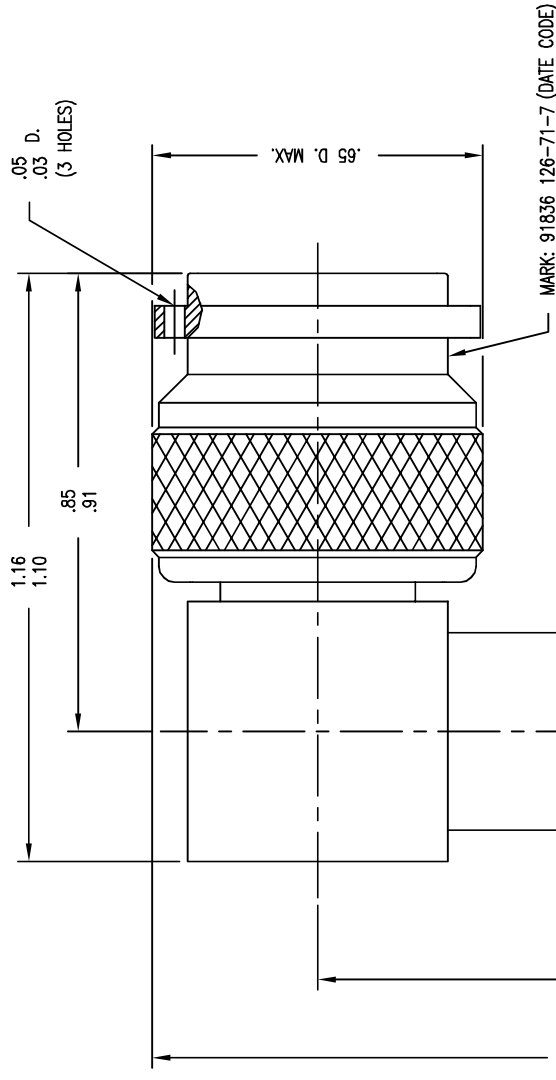

NOTES

1. FOR USE WITH BOEING BM513-65 OG & ADAMS RUSSELL FC20Z CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-546-1.
3. FOR CRIMPING USE DIE KTH-2216.
4. INTERFACE PER MIL-STD-348, FIG. 313-1.
5. CENTER CONTACT (1-504-46MA9) SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: HS5938-2
126-71-7 (DATE CODE)
7. MATERIALS:
 - INSULATORS: TEFLON, ASTM D1710
 - GASKET: SIL RUB., A-A-59588
 - C-RING: PHOS. BRONZE, ASTM B103
 - K-RING SLEEVE: COM. BRONZE, ASTM B135
 - OUTER CONTACT, CENTER CONTACT F: BER. COP., ASTM B196
 - ALL OTHER METAL PARTS: BRASS, ASTM B16
8. FINISHES:
 - CENTER CONTACTS: .000050 MIN GOLD PLATE PER ASTM B488 OVER .000050 MIN NICKEL PER AMS-QQ-N-290 (RoHS)
 - OUTER CONTACT: .000200 MIN SILVER PLATE PER ASTM B700 OVER .000020 MIN COPPER PER ASTM B734 (RoHS)
 - ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N-290 OVER .000050 MIN COPPER PER ASTM B734 (RoHS)
9. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - WORKING VOLTAGE: 500 VRMS
 - FREQUENCY RANGE: DC TO 11 GHz
 - VSWR: 1.30 MAX. .5 TO 11 GHz.
 - INSERTION LOSS: .21 dB MAX. AT 9 GHz
10. WEIGHT: 37.0 GRAMS

REVISIONS

ISSUE	CHANGES
0	ER 37069 AR 07/18/96
1	CN 38472 E TML 01/21/02
2	CN 39581 A JPK 08/17/06
3	CN 40088 E PMC 10/05/07
E	REVISED PER ER25008 CGR 06/15/10
F	REVISED PER DMF304 & ER39951 TZ 02/02/12

CUSTOMER
SALES DRAWING

THIS DRAWING, THE DESIGNS AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.

SCALE	4:1		
APPROX SURFACE AREA			
CAGE CODE: 91836			
REF: BOEING			
PLUG, SC (KEYED)			
DRAWN	AR	DATE	07/18/96
DESIGN	AR	DATE	07/18/96
APPR.		DATE	
		Winchester Electronics 62 Barnes Industrial Road North Wallingford, CT 06492	

126-71-7