
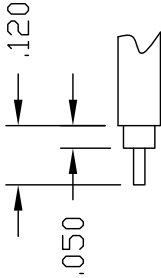


NOTES:
INTERFACE CONFORMS TO MIL-PRF-39012 SMA SERIES

- MATERIALS:
- CONTACT- BRASS PER ASTM-B-16
 - BODY & COUPLING NUT- STAINLESS STEEL PER ASTM-A-582
 - SNAP RING- BERYLLIUM COPPER PER ASTM-B-196
 - GASKET- SILICONE PER ZZ-R-765
 - INSULATOR- TEFLON PER ASTM-D-1710

- FINISHES:
- CONTACT,BODY- GOLD PLATE PER MIL-G-45204
 - COUPLING NUT- PASSIVATE PER QQ-P-35

- ELECTRICALS:
- | | | |
|------|----------|------|
| VSWR | 1GHz | 1.03 |
| | 2.5 GHz | 1.05 |
| | 5 GHz | 1.10 |
| | 12.4 GHz | 1.17 |

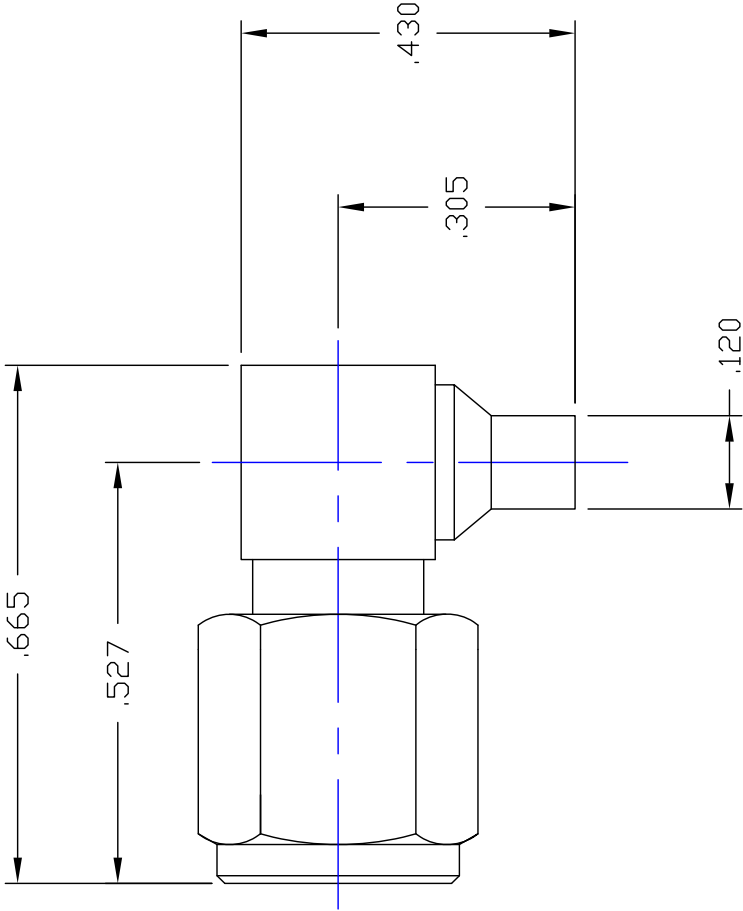

RECOMMENDED
CABLE STRIPPING DIM'S

THIS DRAWING THE DESIGNS AND IDEAS EMBEDDED IN OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE CONCENT, OF AN EZ FORM COMPANY	APPD	J.A.B. 8-16-05	A.T. 2-10-16	UNLESS OTHERWISE SPECIFIED:										
	BY	DATE	P.J.P. 8-16-05	T.D. 2-10-16	DIMENSIONS ARE IN INCHES:				SCALE					
					TOLERANCES:									
	DESCRIPTION				DECIMALS: 2-PLACE ± .010 3-PLACE ± .015				FRACTIONS ± 1/64 ANGLES ± 3°					
					MATERIAL: _____				TITLE					
				FINISH: _____				SMA RIGHT ANGLE MALE PLUG FOR .086 SEMI RIGID CABLE						
REV.	A	ADDED ELECTRICAL NOTES	ECN #9999 REMOVED CD FROM TITLE BLOCK	DRAWN P.J.P.	DATE 1-22-04	CHECKED J.A.B.	DATE 1-22-04	CODE IDENT.		REV.				
								9W826		B				
								A		705523-186				