

1.0 PERFORMANCE
 1.1 FREQ RANGE: DC-4 GHz
 1.2 NOMINAL IMPEDANCE: 50 OHMS
 1.3 DWV: 1500 Vrms, 60 Hz
 1.4 TEMP RANGE: -65/+165C
 1.5 WEATHERIZATION: IP-65

2.0 MATERIALS
 2.1 DIELECTRIC: PTFE
 2.2 SPRING WASHERS: BeCu
 2.3 OTHER METAL PARTS: BRASS
 2.4 GASKETS: Si RUBBER


3.0 MECHANICAL
 3.1 INTERFACE PER MIL-STD-348


DWG NO.
 OL-959A-1

REV.
 C

PART NUMBER	BODY	CONTACT
UG-959A/U	NICKEL	SILVER
UG-959A/U NI/GOLD	NICKEL	GOLD/Cu
UG-959A/U SI/GOLD	SILVER	GOLD/Cu

PLATE PER STI 7.3.1-8

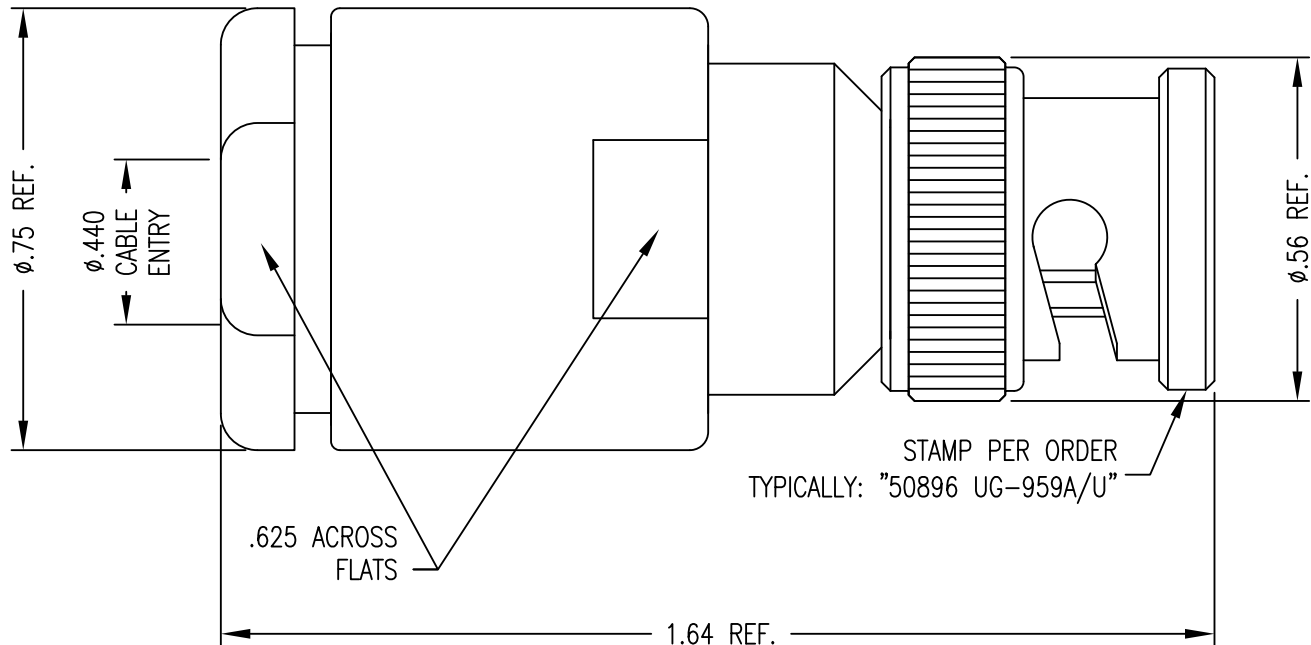

					PROPRIETARY THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN*TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN*TRON INCORPORATED.				 SAN • TRON, INC. 4 NEWBURYPORT TPK, IPSWICH, MA 01938		
C	WAS IP-66	4/4/14	FSH	FSH	REMOVE ALL BURRS AND SHARP EDGES .005 MAX. UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING				TITLE BNC CLAMP PLUG FOR RG-8, 9, 213, 214		
B	ADD PLATING TABLE	9-18-08	FSH	FSH					MATERIAL: SEE NOTE 2.0		
A	ORIGINAL	11/9/07							FINISH: SEE NOTE 3.0		
Rev.	Revisions		Date	Dwn.	Appd.	UNSPECIFIED TOL. DEC. ± .005 FRAC. ± 1/64 ANG. ± 1/2°			FSCM NO. 50896		
RECOM. STOCK SIZE		FT/M PCS	QTY REQD			DWN FSH 11/9/07 CHKD SJS / APPR FSH 11/9/07			DWG NO. OL-959A-1		
						CONCENTRICITY .004 TIR ALL MACHINED SUFACES			SCALE 3:1		
						63/			REV. C		