
This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of Winchester Electronics. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of Winchester Electronics.

REV	DESCRIPTION	DATE	APPROVED
G	ER070768	12/08/17	DCAM

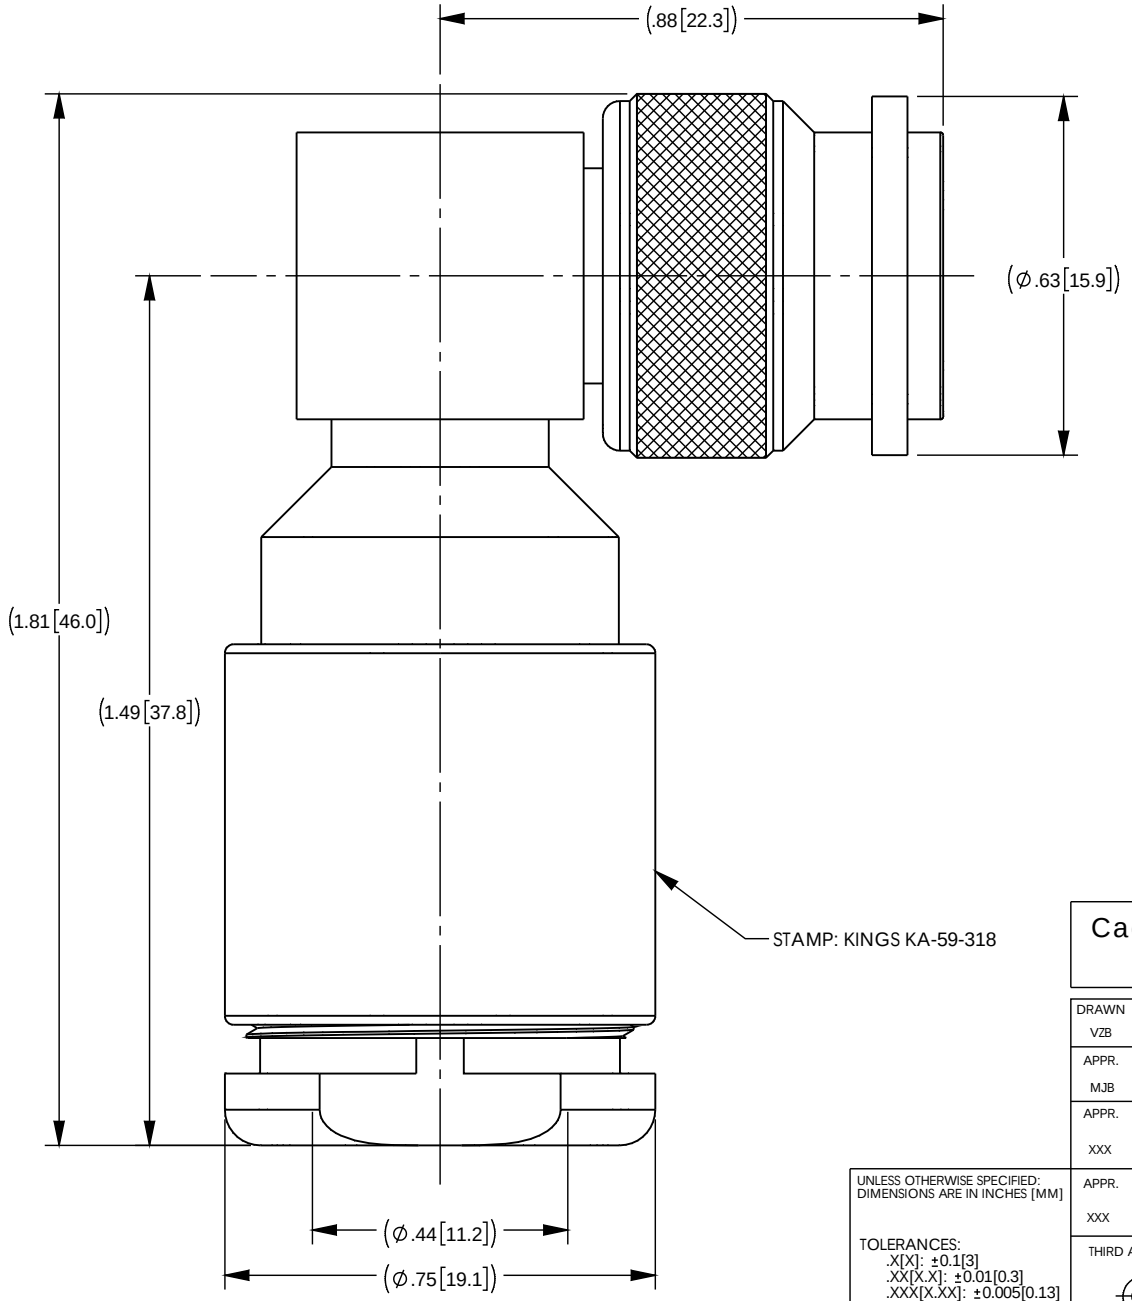

NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR USE WITH GR-9, 9A, 9B, 108, 214, 225, & 393/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS, SEE CP-209A.
3. FOR CABLE TRIMMING, USE KTH-24 & KTH-81.
4. FOR FORMING, USE CRIMP DIE KTH-2004.
5. MATERIALS:
   OUTER CONTACT & ANGLE CONTACT: BERYLLIUM COPPER, ASTM B196
   WASHER: COPPER, QQ-C-576
   C-RING: PHOSPHOR BRONZE, ASTM B103
   K-GRIP SLEEVE: COMMERCIAL BRONZE TUBE
   INSULATORS: PTFE, ASTM D1710
   GASKETS: SILICONE RUBBER, A-A-59588
   ALL OTHER METAL PARTS: BRASS, ASTM B16.
6. FINISHES:
   ALL METAL PARTS: SILVER PLATE, ASTM B700.
7. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: 50 OHMS
   FREQUENCY RANGE: DC TO 11 GHz
   VOLTAGE RATING: 500 VRMS.

Cage Code:	KINGS®

DRAWN VZB	DATE XX/XX/75
APPR. MJB	DATE XX/XX/75
APPR. XXX	DATE XX/XX/XX
APPR. XXX	DATE XX/XX/XX

WINCHESTER ELECTRONICS

Winchester Electronics
199 Park Road Extension, Suite 104
Middlebury, CT 06762

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]

TOLERANCES:
.X[X]: ±0.1[3]
.XX[X.X]: ±0.01[0.3]
.XXX[X.XX]: ±0.005[0.13]
ANGLES: ±2.0°

THIRD ANGLE PROJECTION

TITLE:

TNC ANGLE PLUG

SIZE	DWG. NO.	REV
A	SDKA-59-318	G
SH 1 OF 1		

DMF029_C