

Engineered Products:

SilverLine™

Test Cables

ISO 9001 Certified

Coax Test Cables for:

- High Volume Production Test Stations
- Research & Development Labs
- Environmental & Temperature Test Chambers
- Replacement for OEM Test Port Cables
- Field RF Testing
- Cellular Infrastructure Site Testing




Time's SilverLine™ Product Guarantee

Times will repair or replace your SilverLine test cable at its option if the connector attachment fails within four months of shipment. This guarantee excludes cable or connector interface damage from misuse or abuse.

SilverLine™ Test Cables are cost effective, durable, high-performance cable assemblies designed for use in a broad range of test and interconnect applications. Fabricated from rugged, solid PTFE dielectric cable with stainless steel connectors and a proven strain relief system, these cables provide long life and excellent stability in applications where they are repeatedly flexed and mated/unmated. SilverLine™ test cables are ideal for use in production, field and laboratory test environments. They are also economical enough to be used as interconnects in test systems.

Features & Benefits:

- Phase & Loss Stable
- Long Flex Life
- Triple Shielded Cable
- High Mating Cycle, Stainless Steel Connectors
- Rugged, Solder-Clamp Attachment
- Redundant, Long Life Strain Relief System
- ROHS Compliant

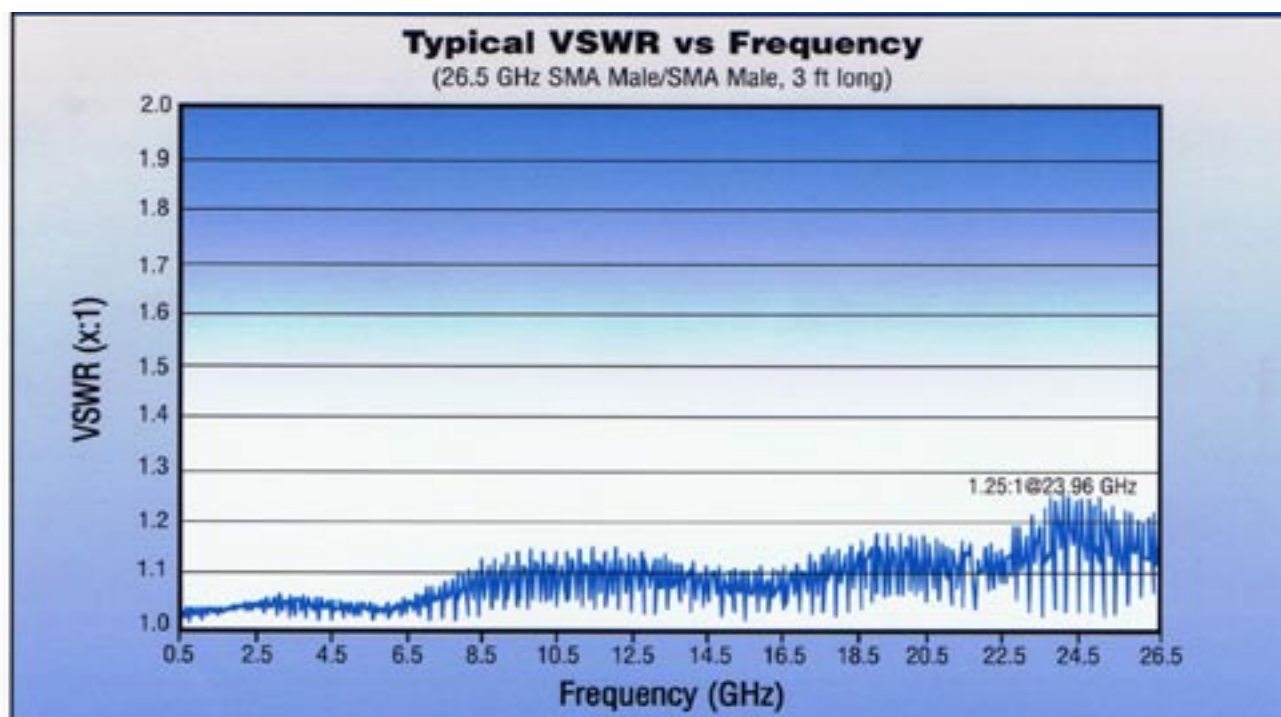Engineered Products:


Ordering Information

U = Unarmored
A = Armored

SLXXX-XXXXXX-XX.XXX

Maximum Frequency

04 = 4.0 GHz (BNC equipped only)
06 = 6.0 GHz
18 = 18.0 GHz
26 = 26.5 GHz (SMA, 2.4mm, 3.5mm only)




3.5mm Female (L), Ruggedized 3.5mm Female (R)

3.5mm Male (L), Ruggedized 3.5mm Male (R)

Feet: 0.50 ft Increments
Example: -04.50F = 4.50 ft
Meters: 0.25 m increments
Example: -00.75M = 0.75 m

F = Feet M = Meters

Connector Codes (2 or 3 Characters)

BM	= BNC Male
SM	= SMA Male
S1T	= SMA Male OneTurn™
SF	= SMA Female
SMR	= SMA Right Angle
35M	= 3.5mm Male
35F	= 3.5mm Female
3RM	= 3.5mm Ruggedized Male
3RF	= 3.5mm Ruggedized Female
2RF	= 2.4mm Ruggedized Female
NM	= Type N Male
N1T	= Type N Male OneTurn™
NF	= Type N Female
NMR	= Type N Right Angle
70M	= 7mm
76M	= 7-16 DIN Male
76F	= 7-16 DIN Female
TM	= ETNC Male (Extended range)
TF	= ETNC Female (Extended range)
QMM	= QMA Male


First Connector

Second Connector

Some connector combinations and/or lengths may be unavailable. Please contact Times or your Times authorized representative.

Engineered Products:

SilverLine™ Specifications:

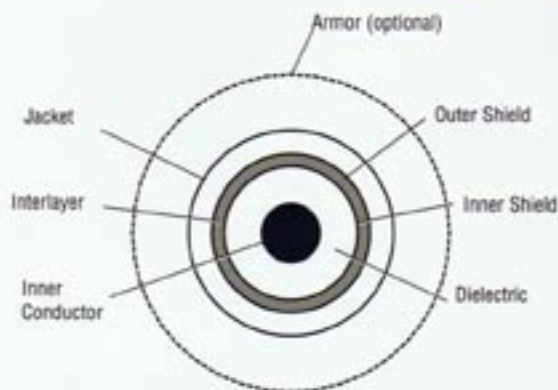

Cable Construction

Inner Conductor: Solid Silver Plated Copper
Clad Steel

Dielectric: Solid PTFE

Shield: Silver-Plated Copper Flat Ribbon Braid
Aluminum-Polyimide Tape Interlayer
36 GA Silver-Plated Copper Braid (90%k)

Jacket: Clear FEP

Armor (Optional): Steel wire reinforced, thick wall,
high flex life clear PVC

Connectors

- Passivated stainless steel finish
(QMA coupling nut nickel plated brass)
- QMA sure-grip coupling nut design
- Captive contact
- Thick wall interface (SMA)
- Gold plated beryllium copper center contacts
- PTFE dielectric
- Type N OneTurn™ (1 full rotation to mate)
- High temperature 7mm
- Knurl/hex coupling nut (Type N and TNC)
- Precision grade 7-16

Connector Attachment/Strain Relief

- Rugged, solder-clamp to braid. 175 lb pull force.
Additional crimp system on armored version.
- Redundant triple layer strain relief system
(Dual layer on armored version)

Physical & Mechanical Specifications

Dimensions	in	mm
Inner Conductor	0.037	0.94
Dielectric	0.116	2.95
Inner Shield	0.126	3.20
Interlayer	0.132	3.35
Outer Shield	0.154	3.91
Jacket	0.195	4.95
Armor (optional)	0.450	11.50
Weight lbs./ft (kg/m)	Cable: 0.043 (0.064) Armor: 0.066 (0.098)	
Armor Crush Resistance	1200 lbs. per linear inch	
Bend Radius: minimum	1	25
Connector Retention	Unarmored & Armored > 175 lbs	
Mating Life Cycle	SMA, Type N: > 5000* QMA: > 2500*	
Length Tolerances	≤ 2 ft. or 0.75m, -0, +0.50" (12.7mm) > 2 ft. or 0.75m, -0, +2% of length	
Temperature Range	-67°/+221°F	-55°/+105°C

Electrical Specifications

VSWR Max		4 GHz	6 GHz	18 GHz	26.5 GHz**
	BNC	1.20:1			
	7-16 DIN, QMA		1.25:1		
	SMA, 2.4mm, 3.5mm, Type N, TNC		1.20:1	1.30:1 1.35:1 (R/Ks)	1.35:1 (SMA, 2.4mm, 3.5mm)
	7mm		1.25:1	1.35:1	
Impedance		50 ohms			
Velocity of Propagation		70 %			
Shielding Effectiveness		>100 dB			
Capacitance		29.4 pF/ft = 96.4 pF/meter			
Phase Stability (ten, 4" radius, 180° reverse bends)		DC to 10 GHz: +/- 1.1° 10 to 18 GHz: +/- 2.0°			
Attenuation Max @ +77°F (+25°C)					
Attenuation	(GHz)	dB/100 ft		dB/100 m	
	1	12.2		40.0	
	2	18.0		59.0	
	6	34.2		112	
	12	52.5		172	
	18	68.4		224	
	26.5	88.7		290	
Attenuation at Frequency		(A-K1 FMHz + K2 FMHz)			
	K1	0.348			
	K2	0.0012			
Power Handling @ +77°F (+25°C) (Sea Level) (Cable Only***)					
Power Handling	(GHz)	Watts (max.)			
	0.4	891			
	1	539			
	2	363			
	6	180			
	12	117			
	18	88			
	26.5	65			

* SMA Male & Type N: Assumes use of calibrated torque wrench, proper care and cleaning of interface and mated connector is within and per limits. ** QMA: Assumes proper use, care and cleaning.

** All 26.5 GHz cables are RF characterized on a production basis through 20.0 GHz.

*** Connector configuration may limit cable assembly maximum power handling capability.

Specifications subject to change without notice.

Engineered Products:



NEW! 18GHz QMA r/a
with Quick Release

Specifications:

- Frequency response: DC-18.0 GHz (QMA, QMA r/a, Type N, SMA and TNC)
- VSWR: 1:35:1 Maximum, 1:25:1 Typical (Cable Assembly with Mated Adaptor)

Features & Benefits:

- High Frequency Operation
- 5000 Mate Life
- SureGrip™ Coupling Nut
- Smooth, Fast Retraction for Quick Changes
- Large Interface Selection
- Between Series & Reverse Polarity Interfaces

Adaptors From QMA Jack To:



Between & Within Series Adaptors and Termination

