
©2005

Mini Coax Support Blocks for Coaxial Cable Applications

1555 PR A (page 1 of 2)

PRODUCT DESCRIPTION

The Mini Coax Support Block is a second generation block hanger system designed specifically for wireless applications. Stackable space saving units provide versatility in all applications reducing material and installation costs by over 50% by requiring only one 3/8" or 10mm threaded rod to secure up to six runs of coax. Mini Coax Support Blocks are manufactured from a durable weather resistant Long Glass Polypropylene which exceeds the recommended temperature parameters for coaxial cable i.e. (-40° to 185° F). Thermal, chemical, and UV resistance ensure long term integrity in extreme environments including mountain tops, deserts, coastal, and industrial type applications. Molded alignment pins also serve as locking devices as the two Block Hangers are firmly tightened together to create the solid hanger.

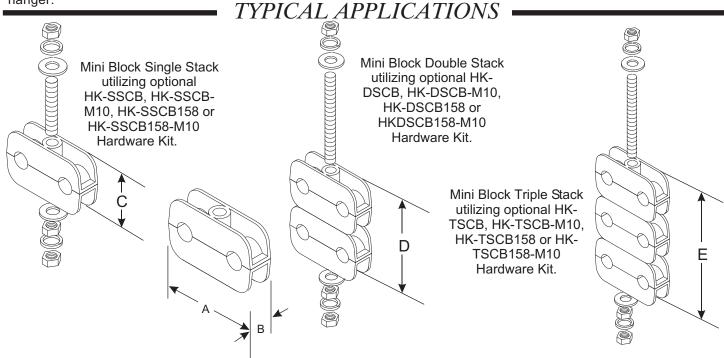

SPECIFICATIONS |

MINI COAX SUPPORT BLOCKS									
Part #	Cable Type	# of Runs	"A"	"B"	"C"	"D"	"E"	Wt. Lbs (Wt. Kg)	Kit Qty.
CB-600T	LMR-600	2	3.28" (83.3mm)	.825" (21.1mm)	2" (50.8mm)	4" (101.6mm)	6" (152.4mm)	1.2 (0.5)	Kit of 10
CB-900T	LMR-900	2						1.2 (0.5)	Kit of 10
CB-1200T	LMR-1200	2	5.33" (135.4mm)	.825" (21.1mm)	2" (50.8mm)	4" (101.6mm)	6" (152.4mm)	1.2 (0.5)	Kit of 10
CB-1700T	LMR-1700	2	6.13" (155.7mm)	.825" (21.1mm)	2.48" (63.1mm)	4.96" (126.1mm)	7.44" (189.1mm)	1.7 (0.8)	Kit of 10



World Headquarters: 358 Hall Avenue, Wallingford, CT 06492 • 203-949-8400, 1-800-867-2629 FAX: 203-949-8423 International Sales: 4 School Brae, Dysart, Kirkcaldy, Fife, Scotland KY1 2XB UK • +44(0)1592655428 FAX: +44(0)1592653162 China Sales: Unit A, Floor 14, East Ocean Center, No. 618 Yan'an Road East, Shanghai, China 200001 TEL: 86-21-53854500/53854501 FAX: 86-21-53854506